


DULUTH TIMBER COMPANY

LOGGING THE
INDUSTRIAL FOREST®

Founded in 1985 by Max Taubert
Timber yards in Duluth, MN and Edison, WA

phone: (218) 727-2145
fax: (218) 727-0393

email: info@duluthtimber.com
web: www.duluthtimber.com

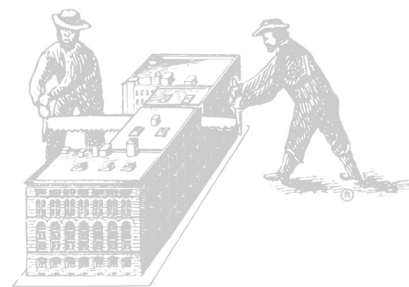

Engineered Flooring Mixed Grain Douglas Fir

>PRODUCT DESCRIPTION

Our Mixed Grain Engineered Douglas Fir Flooring offers the best of both worlds: high-character reclaimed Douglas fir wear layer bonded to precision-cut engineered base. This smooth-sawn, sanded surface features grain variation and first-use character – true story boards. Available in three widths (3.25" - 6.25"), pre-finished or unfinished. Wear layer is 3/16" of solid reclaimed Douglas fir (*Pseudotsuga menziesii*), good for several refinishing cycles. Hardwood plywood base. Perfect for installation over radiant heat.

>SOURCE

Heavy timber and lumber from dismantled warehouses, factories, etc. across North America. All original trees were old-growth, harvested from the Pacific Northwest in the early 20th century. Grown, sawn, built, deconstructed & remilled in America. Underlayer of FSC-certified hardwood plywood. Fabricated by an FSC-certified company in Minnesota.

>COLOR TONES

Rose, blush, honey and brown tones for rich story-boards under foot.

>GRAIN PATTERN

Mixed grain floors will have both flat sawn and vertical sawn boards. Some individual boards will contain both grain orientations.

>CHARACTER

Small to medium sized knots, tight and mostly checked. Expect nail holes, nail stains and other signs of this old wood's previous life.

>MILLWORK

Smooth-sawn and sanded, precision-cut tongue and groove, micro-level edge and end-matched.

>BASE

7/16" of hardwood plywood. No added formaldehyde. Lifetime structural warranty. Products pass NWFA* water soak tests for durable glue bonds.

>DIMENSIONS

5/8" overall thickness with 3/16" thick wear layer;
3.25", 5.25" and 6.25" widths; random lengths 2' - 8'.

>FINISH

Optional pre-finish, standard is aluminum oxide UV-cured coating. Call for other finish options. Also available unfinished. 25-year finish warranty.

>PRICING

Please call or fax for a price quote.

>CONTINUED

**>p2
Engineered Flooring
Mixed Grain Douglas Fir**

>LEAD TIME

Approximately 3 weeks; more is always appreciated.

>INSTALLATION

For all flooring, we suggest you order a minimum 5% extra allowance and schedule delivery to the site at least two weeks prior to laying the floor. Flooring should be laid as per install guidelines of the National Wood Flooring Manufacturers Association (NOFMA).

>CERTIFICATION / LEED*

Certified as 'FSC-Mixed' through standards set by the Forest Stewardship Council (SCS-COC-002432C). Recycled wood products like this one can contribute to various LEED® credits, including Material & Resources. CSI Division 9-Finishes.

*CSI = Construction Specification Institute

*FSC = Forest Stewardship Council

*LEED = Leadership in Energy and Environmental Design

*NWFA = National Wood Flooring Association

Specifications are subject to change. **Call for quotes or samples.**
Photos and installation gallery online at www.duluthtimber.com