


DULUTH TIMBER COMPANY

LOGGING THE
INDUSTRIAL FOREST®

Founded in 1985 by Max Taubert
Timber yards in Duluth, MN and Edison, WA

phone: (218) 727-2145
fax: (218) 727-0393

email: info@duluthtimber.com
web: www.duluthtimber.com

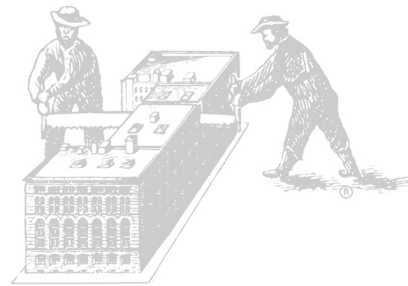

Engineered Flooring Vertical Grain Douglas Fir

> PRODUCT DESCRIPTION

Our Vertical Grain Engineered Douglas Fir Flooring brings remarkable vertical grain in this antique wood, stable for all applications. It offers the best of both worlds: old-growth Douglas fir wear layer bonded to precision-cut engineered base. Available pre-finished or unfinished, the surface boasts gorgeous, tight vertical grain. Wear layer is 3/16" of solid reclaimed Douglas fir (*Pseudotsuga menziesii*), good for several refinishing cycles. Perfect for installation over radiant heat.

> SOURCE

Heavy timber and lumber from dismantled warehouses, factories, etc. across North America. All original trees were old-growth, harvested from the Pacific Northwest in the early 20th century. Grown, sawn, built, deconstructed & remilled in America. Underlayer of FSC-certified hardwood plywood. Fabricated by an FSC-certified company in Minnesota.

> COLOR TONES

Rose, blush, pink and honey tones for soft radiance under foot

> GRAIN PATTERN

Vertical, tight grain

> CHARACTER

Infrequent small knots and minimal light surface-checking. This material has very few nail holes, nail stains or other signs of previous life.

> MILLWORK

Smooth-sawn and sanded, precision-cut tongue and groove, micro-level edge and end-matched.

> BASE

7/16" of hardwood plywood. No added formaldehyde. Lifetime structural warranty. Products pass NWFA* water soak tests for durable glue bonds.

> DIMENSIONS

5/8" overall thickness with 3/16" thick wear layer: 3.25" wide; solid random lengths 2' - 8'.

> FINISH

Optional pre-finish, standard is aluminum oxide UV-cured coating. Call for other finish options. Also available unfinished. 25-year finish warranty.

> PRICING

Please call or fax for a price quote.

>CONTINUED

>p2
Smooth-Sawn Vertical Grain
Engineered Douglas Fir Flooring

>LEAD TIME

Approximately 3 weeks; more is always appreciated.

>INSTALLATION

For all flooring, we suggest you order a minimum 5% extra allowance and schedule delivery to the site at least two weeks prior to laying the floor. Flooring should be laid as per install guidelines of the National Wood Flooring Manufacturers Association (NOFMA).

>CERTIFICATION / LEED*

Certified as 'FSC-Mixed' through standards set by the Forest Stewardship Council (SCS-COC-002432C). Recycled wood products like this one can contribute to various LEED® credits, including Material & Resources. CSI Division 9-Finishes.

*CSI = Construction Specification Institute

*FSC = Forest Stewardship Council

*LEED = Leadership in Energy and Environmental Design

*NWFA = National Wood Flooring Association

Specifications are subject to change. **Call for quotes or samples.**
Photos and installation gallery online at www.duluthtimber.com